

描述 / Descriptions

DFN2×2B-6L 塑封封装 N 沟道 MOS 场效应管。

N-Channel Enhancement Mode Field Effect Transistor in a DFN2×2B-6L Plastic Package.

特征 / Features

$V_{DS} (V) = 20V$ $I_D = 8A$ ($V_{GS} = \pm 12V$)

$R_{DS(ON)} @ 10V < 14m\Omega$ (Typ. $12m\Omega$)



$R_{DS(ON)} @ 4.5V < 20m\Omega$ (Typ. $15m\Omega$)

无卤产品。HF Product.

用途 / Applications

用于低压电路如：汽车电路、DC/DC 转换、便携式产品的电源高效转换。

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.

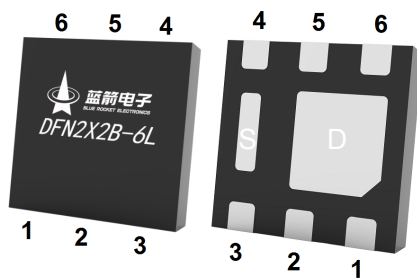内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

出脚	定义
Pin1	D
Pin2	D
Pin3	G
Pin4	S
Pin5	D
Pin6	D

印章代码 / Marking

见印章说明。

See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V _{DSS}	20	V
Drain Current	I _D	8	A
Gate-Source Voltage	V _{GS}	±12	V
Avalanche Current	I _{AS}	12	A
Single Pulsed Avalanche Energy	E _{AS}	115	mJ
Power Dissipation	P	2.8	W
Junction Temperature Range	T _j	150	°C
Storage Temperature Range	T _{stg}	-55~150	°C
Maximum Junction-to-Ambient	t ≤ 10s	R _{θJA}	45
	Steady-State	R _{θJA}	80

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	20	22		V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =20V V _{GS} =0V			1.0	μA
Gate-Body Leakage Current Forward	I _{GSS}	V _{GS} =±12V V _{DS} =0V			±0.1	μA
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V I _D =8.0A		12	14	mΩ
		V _{GS} =4.5V I _D =8.0A		15	20	mΩ
		V _{GS} =2.5V I _D =8.0A		20	35	mΩ
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =250μA	0.4	0.6	1.2	V
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} =0V I _F =1.0A		0.7	1.35	V
Signal Source Resistance	R _g	F=1MHz		3.3		Ω
Input Capacitance	C _{iss}	V _{DS} =10V V _{GS} =0V f=1.0MHz		865		pF
Output Capacitance	C _{oss}			105		
Reverse Transfer Capacitance	C _{rss}			55		
Turn-On Delay Time	t _{d(on)}	V _{DS} =10V V _{GS} =4.5V R _L =1.25Ω R _{GEN} =3Ω		2.7		ns
Turn-On Rise Time	t _r			3		
Turn-Off Delay Time	t _{d(off)}			37		
Turn-Off Fall Time	t _f			7		

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Total Gate Charge	Q_g	$V_{DS}=10V$ $V_{GS}=4.5V$ $I_D=8A$		12.5		nC
Gate-Source Charge	Q_{gs}			1.2		
Gate-Drain Charge	Q_{gd}			2.7		

电参数曲线图 / Electrical Characteristic Curve

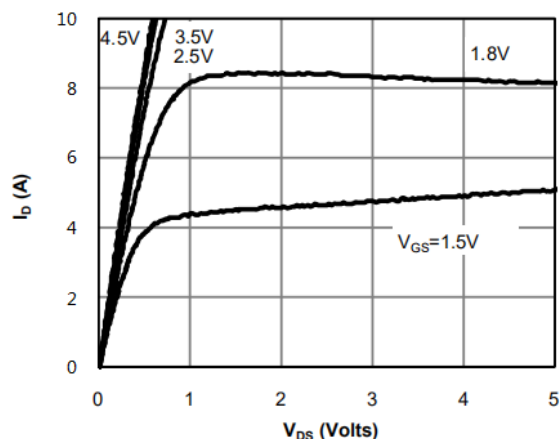


Fig 1: On-Region Characteristics

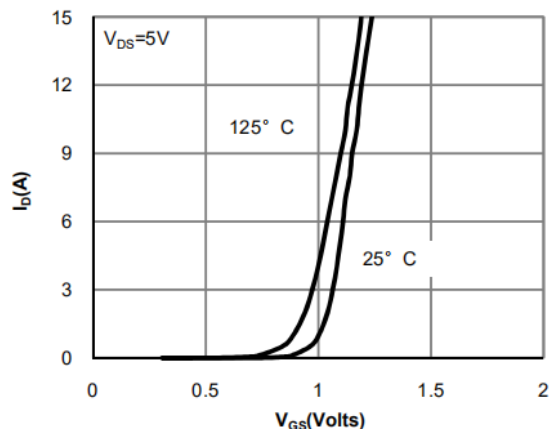


Figure 2: Transfer Characteristics

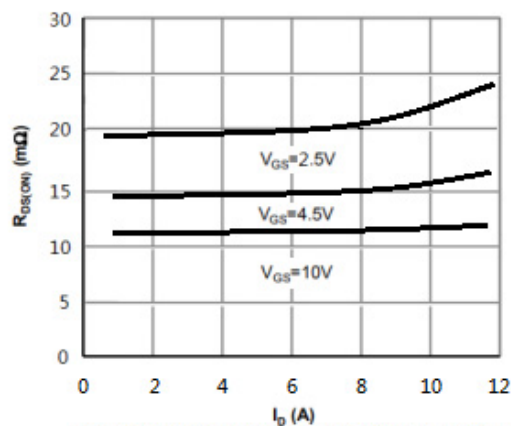


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

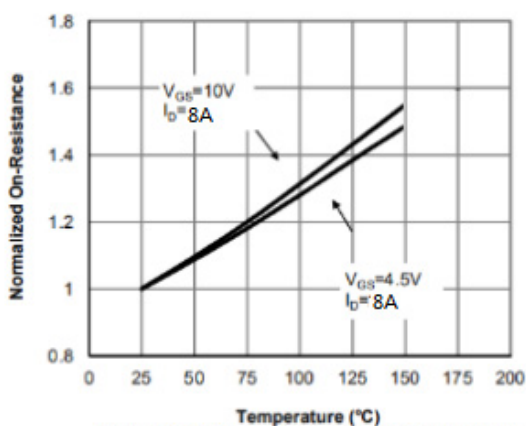


Figure 4: On-Resistance vs. Junction Temperature

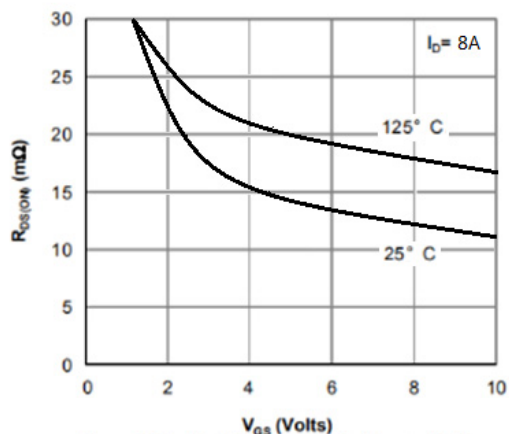


Figure 5: On-Resistance vs. Gate-Source Voltage

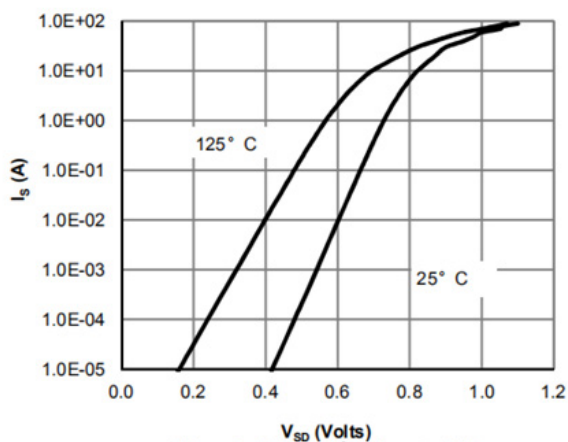


Figure 6: Body-Diode Characteristics

电参数曲线图 / Electrical Characteristic Curve

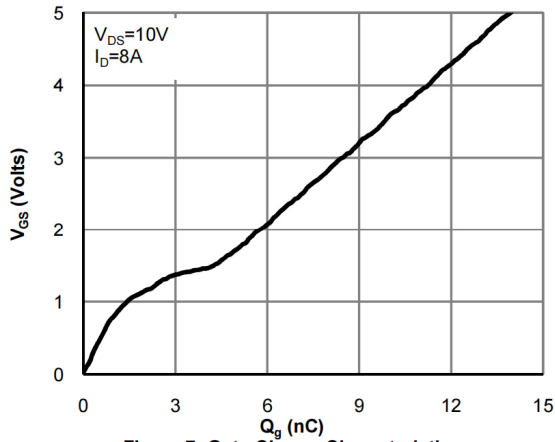


Figure 7: Gate-Charge Characteristics

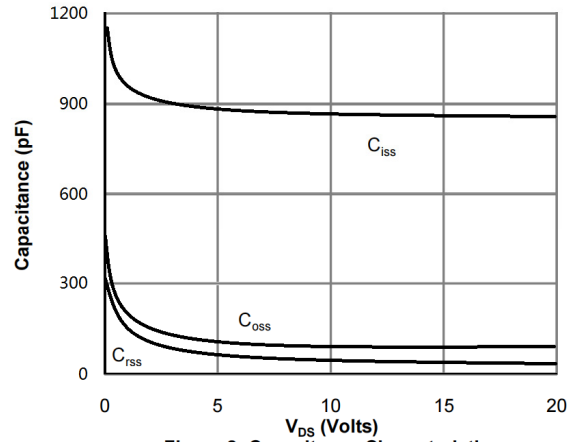


Figure 8: Capacitance Characteristics

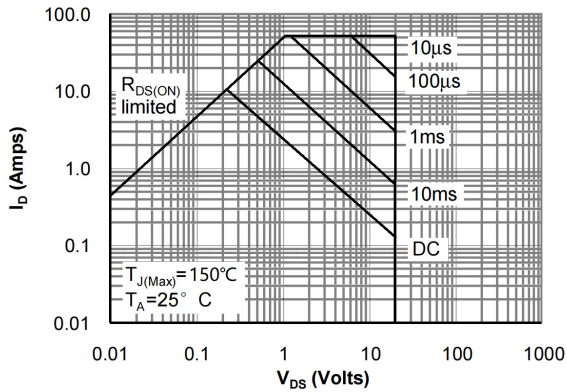


Figure 9: Maximum Forward Biased Safe Operating Area


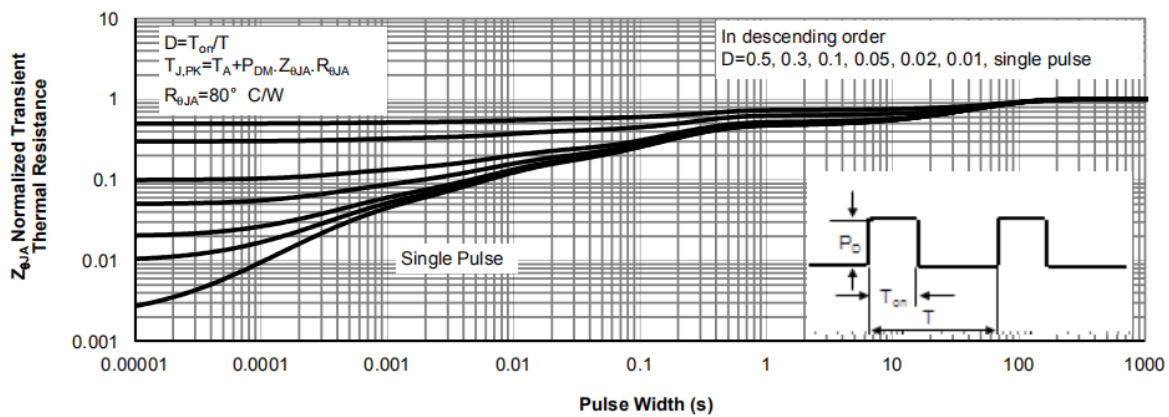


Figure 10: Normalized Maximum Transient Thermal Impedance

外形尺寸图 / Package Dimensions

DFN2 ×2B-6L-0.5

Unit:mm

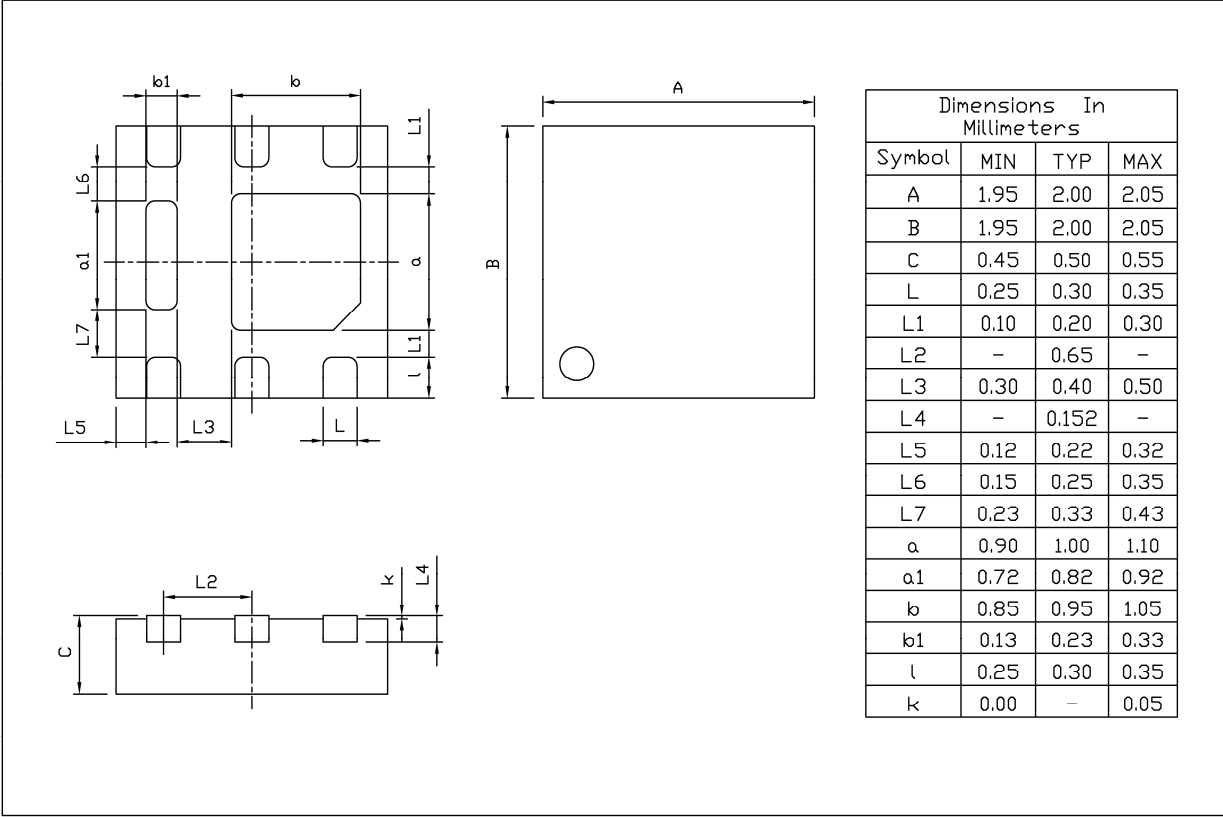

Rev.01 202006

印章说明 / Marking Instructions



说明：

BR： 为公司代码

120N02L： 为型号代码

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

120N02L: Product Type Code

****: Lot No. Code, code change with Lot No.

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

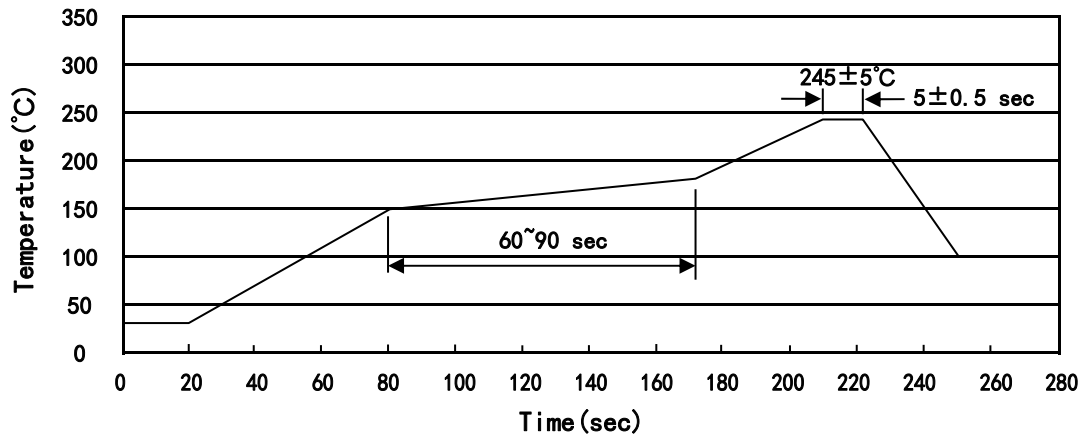

说明：

- 1、预热温度 150~180°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
DFN2×2B-6L	4,000	10	40,000	4	160,000	7" ×8	210×205×205	445×435×230

使用说明 / Notices

本文档中提供的所有信息均受法律免责声明的约束。

All information provided in this document is subject to legal disclaimers.